



Teknisk informasjon

Produktspekter	Harmony Timer Relays
Produkt eller type komponent	Multifunction relay
Digitale utganger	Relé
Kortnavn utstyr	RE22
Nominell utgangsstrøm	8 A

Komplementær

Kontakttype og -sammensetning	1 C/O timet kontakt 1 C/O tidsbestemt eller øyeblikkelig kontakt
Tidsforsinker type	Power on-delay On-delay and off-delay Interval Forsinket av Symmetrical flashing
Tidsforsinkelsesområde	0.1...1 s 6...60 s 1...10 t 1...10 min 1...10 s 10...100 t 6...60 min
Start/stopp	Dreie knapp front panel
[Us] matespenning	12...240 V AC/DC
Spenningsområde	0.85...1.1 Us
Nettfrekvens	50...60 Hz +/- 5 %
Tilkoblingsklemmer	Skruklemmer, 2 x 1,5 mm² med endehylse Skruklemmer, 2 x 2,5 mm² uten endehylse
Tiltrekningsmoment	0,6...1 N.m i samsvar med IEC 60947-1
Kapslingsmateriale	Self-extinguishing
Nøyktighet	+/- 0.5 % i samsvar med IEC 61812-1
Temperature drift	+/- 0.05 %/°C
Spenningsdrift	+/- 0.2 %/V
Setting accuracy of time delay	+/- 10 % av full skala på 25 °C i samsvar med IEC 61812-1
Control signal pulse width	30 Ms 100 ms under belastning
Isolasjonsmotstand	100 MOhm på 500 V DC i samsvar med IEC 60664-1
Recovery time	120 ms on de-energisation
Immunitet mot mikroavbrytelser	10 ms
Strømforbruk i VA	3 VA på 240 V AC
Strømforbruk i W	1,5 W på 240 V DC
Bryteevne	2000 VA
Minimum brytestrøm	10 mA på 5 V
Maks strøm	8 A
Maksimum brytespenning	250 V

Elektrisk levetid	100000 sykluser for Ohmsk last, 8 A på 250 V, AC
Mekanisk levetid	10000000 sykluser
Rated impulse withstand voltage	5 kV for 1,2...50 µs i samsvar med IEC 60664-1 5 kV i samsvar med IEC 61812-1
Power on delay	100 ms
Sikkerhet pålitelighet data	B10d = 230000 MTTFd = 251.1 år
Monteringsposisjon	Alle posisjoner i forhold til normalplanet loddrett feste
Monteringssupport	35 mm DIN-skinne i samsvar med IEC 60715
Status LED	Grønn LED (blinkende) for timing pågår Grønn LED (klar) for POWER ON Gul LED for relay energised
Bredde	22,5 mm
Vekt	0,093 kg
Number of functions	10

Miljø

Dielektrisk styrke	2,5 kV for 1 mA/1 minutt på 50 Hz i samsvar med IEC 61812-1
Standarder	IEC 61812-1 IEC 61000-6-2 IEC 61000-6-1 IEC 61000-6-4 IEC 61000-6-3
Direktiver	2004/108 / EC - elektromagnetisk kompatibilitet 2006/95 / EC - Lavspenningsdirektiv
Produktsertifikater	CSA[RETURN]CE[RETURN]cULus[RETURN]GL[RETURN]RCM[RETURN]CCC[RETURN]EAC
Omgivelsestemperatur drift	-20...60 °C
Omgivelsestemperatur for lagring	-30...60 °C
IP-grad	IP40 kapsling: conforming to IEC 60529 IP20 rekketeklemme: conforming to IEC 60529 IP40 forside: conforming to IEC 60529
Vibrasjonsmotstand	20 m/s ² (f= 10...150 Hz) i samsvar med IEC 60068-2-6
Støtmotstand	15 gn for 11 ms i samsvar med IEC 60068-2-27
Relativ fuktighet	93 %, uten kondens i samsvar med IEC 60068-2-30
Elektromagnetisk kompatibilitet	Immunitetstest for elektrostatisk utladning - test level: 6 kV nivå 3 (kontakt utfloed) conforming to IEC 61000-4-2 Immunitetstest for elektrostatisk utladning - test level: 8 kV nivå 3 (luft utslipp) conforming to IEC 61000-4-2 Raske transienter immunitet test - test level: 1 kV nivå 3 (kapasitiv koble klipp) conforming to IEC 61000-4-4 Raske transienter immunitet test - test level: 2 kV nivå 3 (direkte kontakt) conforming to IEC 61000-4-4 Surge immunitet test - test level: 1 kV nivå 3 (differensialmodus) conforming to IEC 61000-4-5 Surge immunitet test - test level: 2 kV nivå 3 (felles modul) conforming to IEC 61000-4-5 Strålings radiofrekvente elektromagnetiske felt immunitet test - test level: 10 V nivå 3 (0.15...80 MHz) conforming to IEC 61000-4-6 Elektromagnetisk felt immunitetstest - test level: 10 V/m nivå 3 (80 MHz...1 GHz) conforming to IEC 61000-4-3 Immunitet mot spenningsfall - test level: 30 % (500 ms) conforming to IEC 61000-4-11 Immunitet mot spenningsfall - test level: 100 % (20 ms) conforming to IEC 61000-4-11 Strålt og ledet elektromagnetisme klasse B conforming to EN 55022

Forpakkingsinformasjon

Enhetstype pakke 1	PCE
Antall enheter i pakke 1	1
Pakke 1 Høyde	2,500 cm
Pakke 1 Bredde	8,300 cm
Pakke 1 Vekt	9,600 cm
Package 1 Weight	107,000 g
Enhetstype pakke 2	S02
Antall enheter i pakke 2	40

Pakke 2 Høyde	15,000 cm
Pakke 2 Bredde	30,000 cm
Pakke 2 Lengde	40,000 cm
Pakke 2 Vekt	4,800 kg

Bærekraftig

Produktets miljøstatus	Green Premium miljømerket produkt
REACH-regelverk	REACH-erklæring
EU RoHS-direktiv	Proaktivt i samsvar (Produktet inngår ikke i EUs RoHS direktivet)
Kvikksølvfri	Ja
Kinas RoHS-forskrift	Kinas RoHS-Erklæring
Informasjon om RoHS-unntak	Ja
Miljøinformasjon	Produktmiljøprofil
Produktets livssyklus	Informasjon Om Levetidsslutt


Logistisk informasjon

Opprinnelsesland	ID
------------------	----


Garantiperiode

Garanti	18 måneder
---------	------------


Dimensions

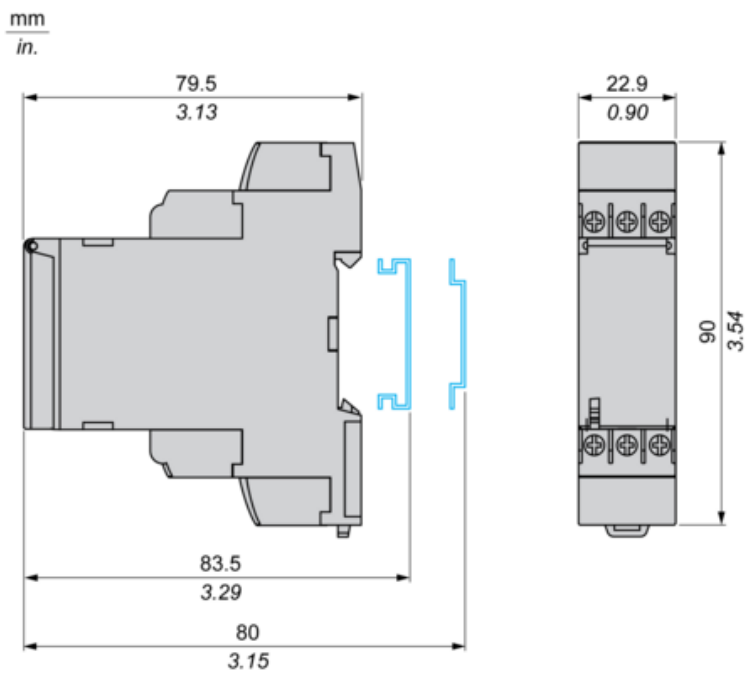

Internal Wiring Diagram




Wiring Diagram



Function A : Power on Delay Relay

Description

The timing period T begins on energization. After timing, the output(s) relay close(s).

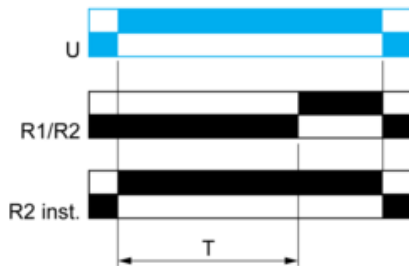

2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)


Function Ac : On- and Off-Delay Relay with Control Signal

Description

After power-up, closing of the control contact Y1 causes the timing period T to start (timing can be interrupted by operating the Gate control contact G). At the end of this timing period, the relay closes.

When control contact Y1 re-opens, the timing T starts. At the end of this timing period T

At the end of this timing period T, the output reverts to its initial position (timing can be interrupted by operating the Gate control contact G).

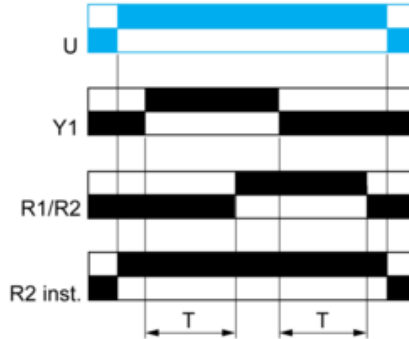


2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

Function At : Power on Delay Relay (Summation) with Control Signal

Description

After power-up, the first opening of control contact Y1 starts the timing. Timing can be interrupted each time control contact closes. When the cumulative total of time periods elapsed reaches the pre-set value T, the output relay closes.

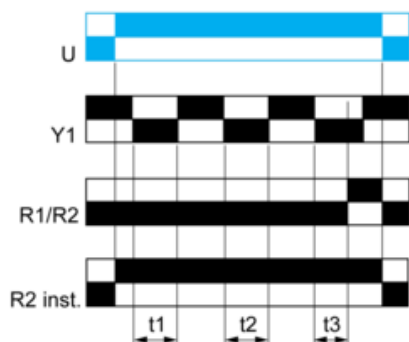


$T = t_1 + t_2 + t_3$

Function B : Interval Relay with Control Signal

Description


After power-up, pulsing or maintaining control contact Y1 starts the timing T. The output relay closes for the duration of the timing period T then reverts to its initial state.

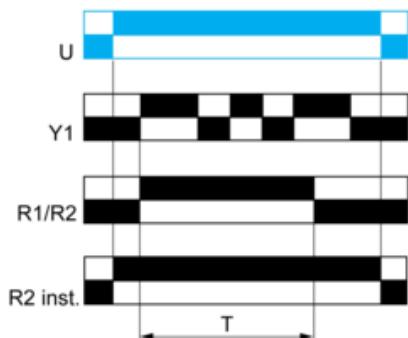

Function Bw : Double Interval Relay with Control Signal

Description


On closing and opening of control contact Y1, the output relay closes for the duration of the timing period T.

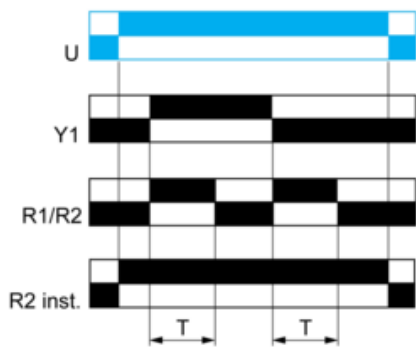

Function C : Off-Delay Relay with Control Signal

Description

After power-up and closing of the control contact Y1, the output relay closes. When control contact Y1 re-opens, timing T starts. At the end of the timing period, the output(s) relay revert(s) to its/their initial state.

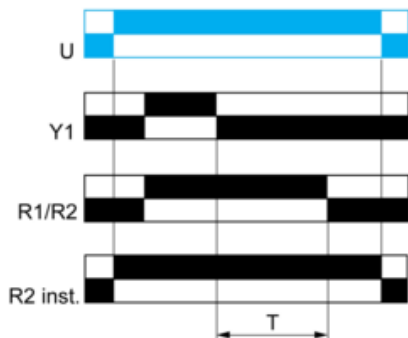


2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

Function D : Symmetrical Flasher Relay (Starting Pulse Off)

Description

Repetitive cycle with two timing periods T of equal duration, with output(s) relay changing state at the end of each timing period T.

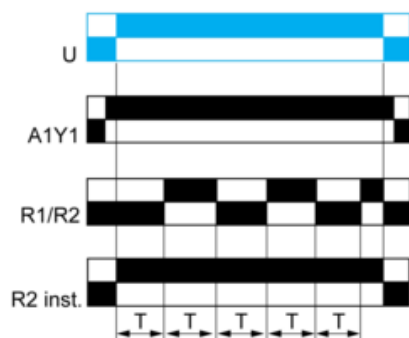


Before power-up Y1 should be permanently connected to A1.
 2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

Function D : Symmetrical Flasher Relay (Starting Pulse On)

Description

Repetitive cycle with two timing periods T of equal duration, with output(s) relay changing state at the end of each timing period T.

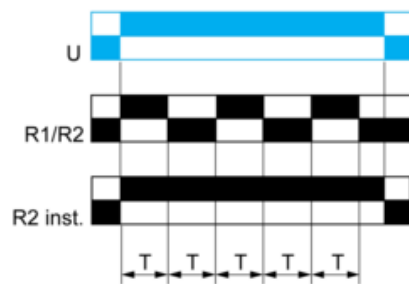


2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

Function H : Interval Relay

Description

On energization of the relay, timing period T starts and the output(s) relay close(s). At the end of the timing period T, the output(s) relay revert(s) to its/their initial state

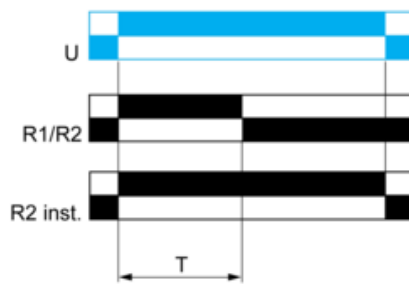

2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

Legend

- Relay de-energised
- Relay energised
- Output open
- Output closed

Y1 :	Control contact
R1/R2 :	2 timed outputs
R2 inst. :	The second output is instantaneous if the right position is selected
T :	Timing period
U :	Supply

Function Ht: Interval Relay & With Pause / Summation Control

Description

On energisation of power supply, output(s) R close(s) and timing period T starts.


The timing can be interrupted / paused each time X1 energizes.

When the cumulative total of time periods elapsed reaches the pre-set value T, the output(s) R revert(s) to its/their initial state Reenergization of X1 will also cause output(s) R close(s) if the time has elapsed and restart the same operation as described at the beginning.

Except for RE17*, RE22R2MMW, RENF22R2MMW, RE22R2MMU and RE22R2MJU, timing can be interrupted / paused each time Y1 energizes.


The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function: 1 Output




$$T = t1 + t2 + \dots$$

Function: 2 Outputs




$$T = t1 + t2 + \dots$$

Function: 1 Output with Retrigger / Restart Control



$$T = t1 + t2 + \dots$$

Function: 2 Outputs with Retrigger / Restart Control



$$T = t1 + t2 + \dots$$