


# Product data sheet

## Characteristics

# C325243

## Acti9 DB, MSC18 Chassis 3PH 250A 24P DF

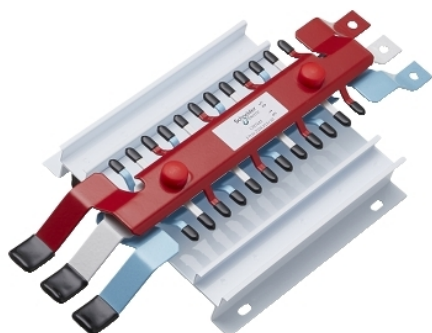

### Main

Range	Acti9
Device short name	MSC 18
Product or component type	Chassis
Device application	Distribution

### Complementary

Range compatibility	Acti9 Acti9 Isobar B distribution board
[In] rated current	250 A
Rated voltage	415 V AC 50 Hz
Short-circuit withstand	25 kA 0.1 s
[Icw] rated short-time withstand current	25 kA
[Ui] rated insulation voltage	500 V
[Uimp] rated impulse withstand voltage	6 kV
Number of ways	1 way (incomer) - 3P 24 ways (outgoer)
Outgoer Pole capacity	24 x 18 mm
Length	218 mm
Width	215 mm




### Environment

Standards	AS/NZS 61439
-----------	--------------

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	9.5 cm
Package 1 Width	24.0 cm
Package 1 Length	50.8 cm
Package 1 Weight	2.154 kg

### Offer Sustainability

Sustainable offer status	Green Premium product
RECh Regulation	 <a href="#">RECh Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China RoHS Regulation	 <a href="#">China RoHS Declaration</a>
RoHS exemption information	 <a href="#">Yes</a>

Environmental Disclosure	 <a href="#">Product Environmental Profile</a>
Circularity Profile	No need of specific recycling operations