70-379-1

Socket, SE Relays, 5A, 14 pins, for printed circuit board, for 782H / 792 relays,



Main Product Range Harmony Electromechanical Relays Product Type Socket Product Compatibility Relay 792XDX Relay 782XDXH Number of Terminals 14 Switch Function 4PDT

4 C/O

Complementary

Complementary		
Rated Current	5 A	
[Ue] rated operational voltage	120 V	
Contact Terminal Arrangement	Mixed	
Connections Terminals	Pins for printed circuit board	
Fixing Mode	By screws printed circuit boards	
Product Weight	0.20 oz (5.8 g)	
Width	0.65 in (16.6 mm)	
Depth	1.00 in (25.40 mm)	

Contact Composition

Environment

Ambient Air Temperature for Storage	-40221 °F (-40105 °C)
Ambient Air Temperature for Operation	-40131 °F (-4055 °C)
Flame Retardance	UL94-V0
Product Certifications	UL[RETURN]CSA[RETURN]CE

Ordering and shipping details

0 11 0		
Category	US10CP221127	
Discount Schedule	0CP2	
GTIN	3606480277900	
Returnability	No	:
Country of origin	CN	

Packing Units


Unit Type of Package 1	PCE	
Number of Units in Package 1	1	
Package 1 Height	0.70 in (1.778 cm)	
Package 1 Width	0.80 in (2.032 cm)	
Package 1 Length	1.10 in (2.794 cm)	
Package 1 Weight	0.16 oz (4.536 g)	
Unit Type of Package 2	BB1	
Number of Units in Package 2	10	
Package 2 Height	0.87 in (2.2 cm)	
Package 2 Width	1.10 in (2.8 cm)	
Package 2 Length	5.20 in (13.2 cm)	

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or intelability of these products for specific user applications. It is the douty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

California proposition 65	WARNING: This product can expose you to chemicals including: Nickel
Offer Sustainability	
Package 3 Weight	13.01 lb(US) (5.9 kg)
Package 3 Length	12.99 in (33 cm)
Package 3 Width	11.42 in (29 cm)
Package 3 Height	8.27 in (21 cm)
Number of Units in Package 3	1000
Unit Type of Package 3	CAR
Package 2 Weight	2.05 oz (58 g)


California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov	
REACh Regulation	☑ REACh Declaration	
REACh free of SVHC	Yes	
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)	
Toxic heavy metal free	Yes	
Mercury free	Yes	
China RoHS Regulation	☐ China RoHS Declaration	
RoHS exemption information	₫Yes	
Circularity Profile	No need of specific recycling operations	
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.	

Dimensions

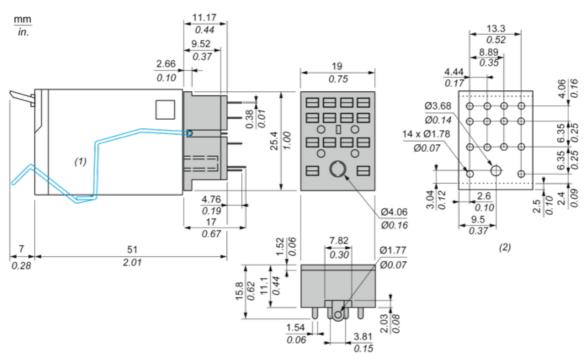

- (1): Metal hold-down clip
- (2): Recommended circuit board layout top view

Wiring Diagram



(1): N.C. (2): N.O. (3): COM (4): Input (5): Ground lug