ZB4BS934

red Ø30 Emergency stop, switching off head Ø22 trigger and latching key release





Main

Range of product	Harmony XB4
Product or component type	Head for emergency switching off push-button
Device short name	ZB4
Bezel material	Chromium plated metal
Mounting diamete	22.5 mm
Sale per indivisible quantity	1
Shape of signaling unit head	Round
Type of operator	Trigger action and mechanical latching
Reset	Key release
Operator profile	Red mushroom Ø 30 mm, unmarked
Type of keylock	Key 455
Key withdrawal position	Center
Head type	Standard
Cap/operator or lens colour	Red

Complementary

Device presentation	Basic element
	C10 for <4 contacts using single and double blocks in front mounting
·	C15 for <1 contacts using single blocks in front mounting
	C11 for <3 contacts using single blocks in front mounting
	C8 for <4 contacts using single and double blocks in front mounting
Electrical composition code	C7 for <4 contacts using single blocks in front mounting
Mechanical durability	300000 cycles
Resistance to high pressure washer	7000000 Pa at 55 °C, distance : 0.1 m
Net weight	0.094 kg
CAD overall depth	79 mm
CAD overall height	30 mm
CAD overall width	30 mm

Environment

Protective treatment	TH
Ambient air temperature for storage	-4070 °C
Ambient air temperature for operation	-4070 °C
Electrical shock protection class	Class I conforming to IEC 61140
IP degree of protection	IP66 conforming to IEC 60529 IP67 IP69 IP69K
NEMA degree of protection	NEMA 13 NEMA 4X NEMA 4 NEMA 12
IK degree of protection	IK03 conforming to IEC 50102

Standards	UL 508
	ISO 13850
	IEC 60947-5-4
	IEC 60947-1
	IEC 60947-5-5
	JIS C8201-5-1
	IEC 60204-1
	IEC 60364-5-53
	GB 14048.5
	IEC 60947-5-1
	CSA C22.2 No 14
	JIS C8201-1
Product certifications	LROS (Lloyds register of shipping)[RETURN]CSA[RETURN]BV[RETURN]UL listed[RETURN]DNV[RETURN]GL
Vibration resistance	5 gn (f= 2500 Hz) conforming to IEC 60068-2-6
Shock resistance	30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27
	50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4 cm
Package 1 Width	5.5 cm
Package 1 Length	9 cm
Package 1 Weight	99 g
Unit Type of Package 2	S01
Number of Units in Package 2	21
Package 2 Height	15 cm
Package 2 Width	15 cm
Package 2 Length	40 cm
Package 2 Weight	2.287 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACh Regulation	REACh Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	₽¥Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information


Contractual warranty

Warranty 18 months	
--------------------	--

Product data sheet Dimensions Drawings

ZB4BS934

Dimensions




Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board (1) (2) (3) (4) Connection by Faston Connectors

- (1) Diameter on finished panel or support
- (2) 40 mm min. / 1.57 in. min.
- (3) 30 mm min. / 1.18 in. min.
- (4) Ø 22.5 mm / 0.89 in. recommended (Ø 22.3 mm $_0$ $^{+0.4}$ / 0.88 in. $_0$ $^{+0.016}$)
- (5) 45 mm min. / 1.78 in. min.
- (6) 32 mm min. / 1.26 in. min.

Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection

Panel Cut-outs (Viewed from Installer's Side)

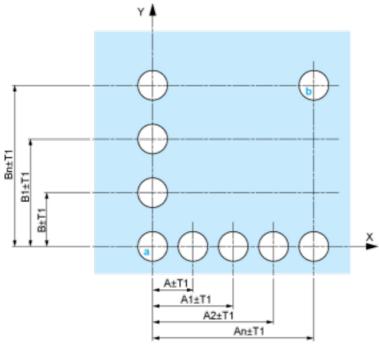


A: 30 mm min. / 1.18 in. min.

B: 40 mm min. / 1.57 in. min.

Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)


Dimensions in mm

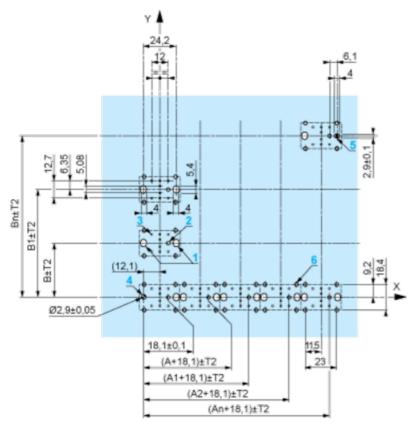

A: 30 mm min.

B: 40 mm min.

Dimensions in in.

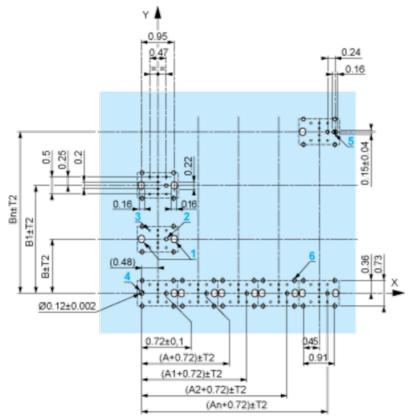

A: 1.18 in. min.

B: 1.57 in. min.


General Tolerances of the Panel and Printed Circuit Board

The cumulative tolerance must not exceed 0.3 mm / 0.012 in: T1 + T2 = 0.3 mm max.

Installation Precautions

- Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB4 BZ009: ± 2 30' (excluding cut-outs marked a and b).
- Tightening torque of screws ZBZ 006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB4 BZ079 fixing collar/pillar and its fixing screws:
 - o every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
 - o with each selector switch head (ZB4 BD•, ZB4 BJ•, ZB4 BG•).

The fixing centers marked a and b are diagonally opposed and must align with those marked 4 and 5.

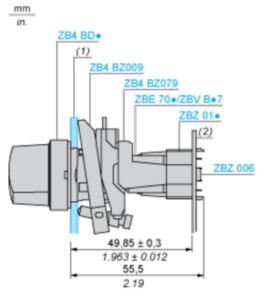

- (1) Panel
- (2) Printed circuit board

Mounting of Adapter (Socket) ZBZ 01•

- 1 2 elongated holes for ZBZ 006 screw access
- 2 1 hole Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 for centring adapter ZBZ 01•
- 38 × Ø 1.2 mm / 0.05 in. holes
- 4 1 hole Ø 2.9 mm ± 0.05 / 0.11 in. ± 0.002, for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- 6 4 holes Ø 2.4 mm / 0.09 in. for clipping in adapter ZBZ 01•

Dimensions An + 18.1 relate to the Ø 2.4 mm \pm 0.05 / 0.09 in. \pm 0.002 holes for centring adapter ZBZ 01•.

1 N/C

Electrical Composition Corresponding to Code C8 Electrical Compositions Corresponding to Code C8 Electrical Compositions Corresponding to Code C10 Electrical Composition Corresponding to Code C10 Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1 Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1	
Electrical Compositions Corresponding to Code C10 Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1 Electrical Composition Corresponding to Code C15	Electrical Composition Corresponding to Code C7
Electrical Compositions Corresponding to Code C10 Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1 Electrical Composition Corresponding to Code C15	
Electrical Compositions Corresponding to Code C10 Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1 Electrical Composition Corresponding to Code C15	Electrical Compositions Corresponding to Code C8
Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1 Electrical Composition Corresponding to Code C15	
Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1 Electrical Composition Corresponding to Code C15	Electrical Compositions Corresponding to Code C10
Electrical Composition Corresponding to Code C15	
1 N/O	Electrical Composition Corresponding to Code C15

Light block

Possible location