


Product data sheet

Characteristics

C125723

Acti9 MSC 27 Chassis for C120 3PH 250A 72P

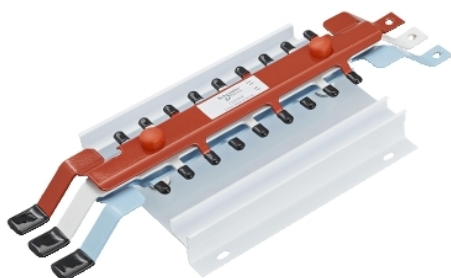

Main

| | |
|---------------------------|--------------|
| Range | Acti 9 |
| Device short name | MSC 27 |
| Product or component type | Chassis |
| Device application | Distribution |

Complementary

| | |
|--|--------------------------------------|
| Range compatibility | Acti 9 Isobar B distribution board |
| [In] rated current | 250 A |
| Short-circuit withstand | 25 kA 0.1 s |
| [Icw] rated short-time withstand current | 25 kA |
| Number of ways | 1 way (incomer) - 3P 72 (outgoer) |
| Outgoer Pole capacity | 72 27 mm |
| Length | 974 mm |
| Width | 215 mm |
| Busbar pitch | 27 mm |

Packing Units

| | |
|------------------|-------------|
| Package 1 Weight | 7.900 kg |
| Package 1 Height | 215.000 mm |
| Package 1 width | 1.000 mm |
| Package 1 Length | 1163.000 mm |

Offer Sustainability

| | |
|-----------------------|--|
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| China RoHS Regulation | China RoHS Declaration |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.