


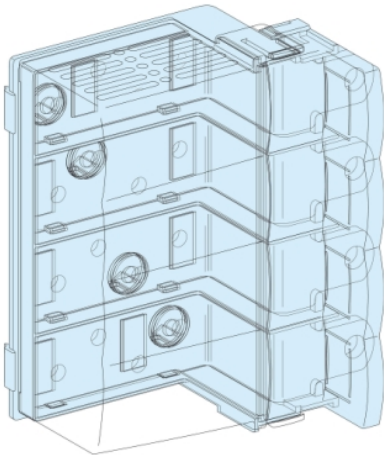

Main

Range	Linergy
Range of product	Linergy
Product or component type	Power supply block
Product name	Linergy BW
Product name	Prisma Prisma P enclosure Prisma Prisma G enclosure Linergy Linergy BW busbar
Accessory / separate part category	Current distribution accessory
Provided equipment	With connection
Standards	IEC 61439-1, inside Prisma IEC 61439-2, inside Prisma
Product certifications	ASEFA

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Complementary

Cubicle-device connection	Linergy BW busbar
Poles description	4P
Installation description	Cubicle - width 650 mm Floor-standing enclosure - width 600 mm Wall-mounted enclosure - width 600 mm Floor-standing enclosure - width 850 mm Pack enclosure - width 600 mm Floor-standing enclosure + duct - width 600 + 300 mm Wall-mounted enclosure + duct - width 600 + 300 mm
Installed device	ComPact: fixed NSX100...160 with earth leakage protection - control: toggle horizontal installation ComPact: fixed NSX250 with earth leakage protection - control: toggle horizontal installation ComPact: fixed INS250 - control: direct front rotary handle horizontal installation ComPact: fixed INS250 - control: direct front rotary handle vertical installation EasyPact: fixed CVS100...160 without earth leakage protection - control: toggle horizontal installation EasyPact: fixed CVS250 without earth leakage protection - control: toggle horizontal installation ComPact: fixed INV250 - control: direct front rotary handle horizontal installation ComPact: fixed INV100 - control: direct front rotary handle horizontal installation ComPact: fixed INV250 - control: direct front rotary handle vertical installation ComPact: plug-in NSX100...160 without earth leakage protection - control: toggle horizontal installation ComPact: plug-in NSX250 without earth leakage protection - control: toggle horizontal installation ComPact: fixed NSX100...160 without earth leakage protection - control: toggle horizontal installation ComPact: fixed NSX250 without earth leakage protection - control: toggle horizontal installation ComPact: fixed NSX100...160 without earth leakage protection - control: direct front rotary handle horizontal installation ComPact: fixed NSX250 without earth leakage protection - control: direct front rotary handle horizontal installation ComPact: fixed NSX100...250 and ammeter without earth leakage protection - control: toggle horizontal installation EasyPact: fixed CVS100...160 with earth leakage protection - control: toggle horizontal installation EasyPact: fixed CVS250 with earth leakage protection - control: toggle horizontal installation ComPact: fixed NSX100...160 with earth leakage protection - control: direct front rotary handle horizontal installation ComPact: fixed NSX250 with earth leakage protection - control: direct front rotary handle horizontal installation ComPact: fixed INV100 - control: direct front rotary handle vertical installation ComPact: fixed INV250 - control: lateral handle vertical installation ComPact: fixed NSX100...160 without earth leakage protection - control: motor mechanism horizontal installation ComPact: fixed NSX250 without earth leakage protection - control: motor mechanism horizontal installation ComPact: fixed INS250 - control: lateral handle vertical installation ComPact: fixed INV200 - control: direct front rotary handle vertical installation ComPact: fixed INV160 - control: direct front rotary handle horizontal installation ComPact: fixed INV160 - control: direct front rotary handle vertical installation ComPact: fixed INV200 - control: direct front rotary handle horizontal installation
[I _e] rated operational current	250 A
[I _n] rated current	250 A
Net weight	1.18 kg

Quantity per set	Set of 1
------------------	----------

[illegible]

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	11 cm
Package 1 Width	14.3 cm
Package 1 Length	17.5 cm
Package 1 Weight	1.19 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile